



ACCORID

AK CORP. CO., LTD.

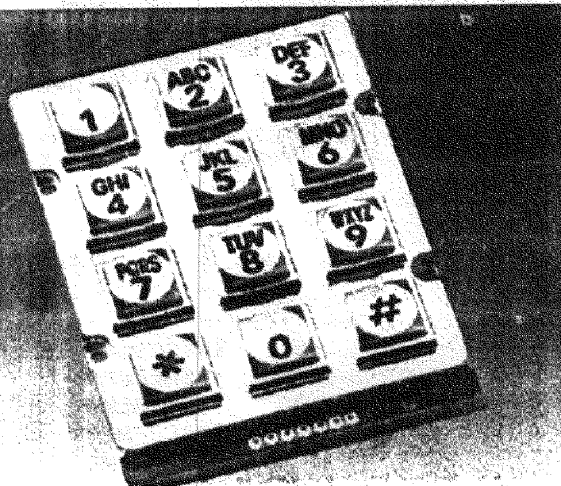

AK-207-A-SSB-WP-MM

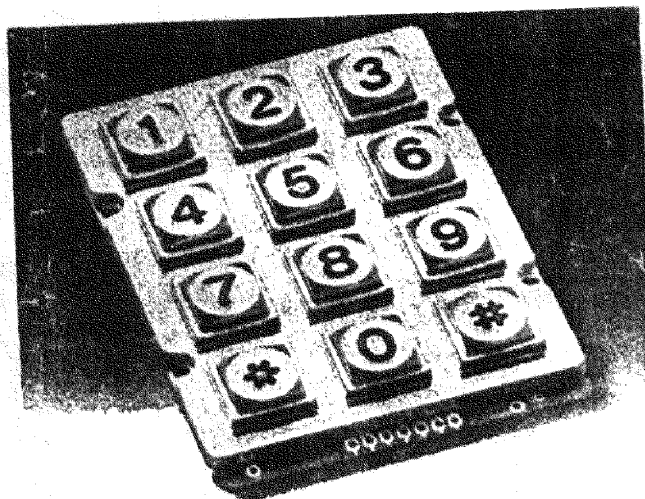


AK-207-N-SSB-WP-MM

GENERAL SPECIFICATION



- Contact rating: 20mA, 24VDC
- Contact resistance: 200 ohm max
- Life: 1,000,000 cycles per key
- Operating Temperature: -20°C to +60°C
- Storage Temperature: -40°C to +65°C

CIRCUIT DIAGRAM



AK-207

OUTPUT ARRANGEMENT		
OUTPUT	PIN NO.	SYMBOL
1		COL 2
2		ROW 1
3		COL 1
4		ROW 4
5		COL 3
6		ROW 3
7		ROW 2

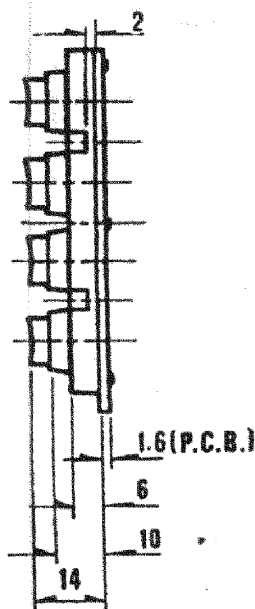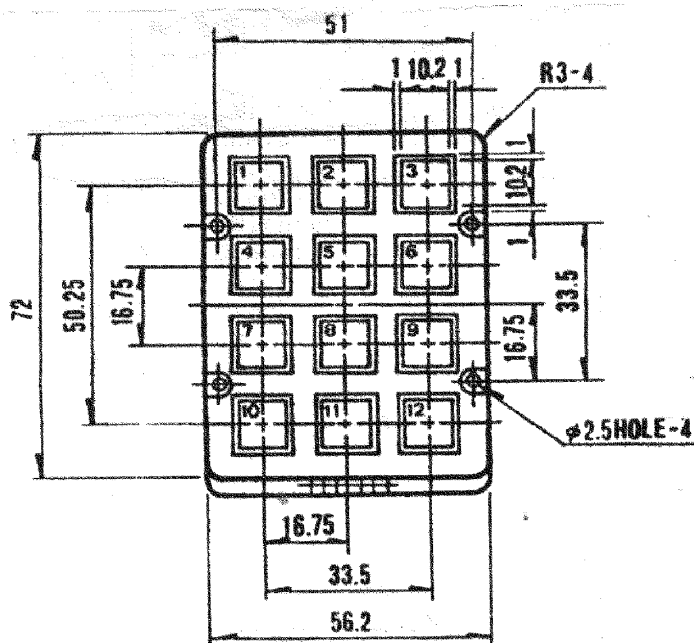

ACTUATING FORCE: 120±30 GRAMS.
STROKE: 2.0±0.5mm